Retail & Indoor Screens

mediawall
Advanced Media Solutions

Product Size

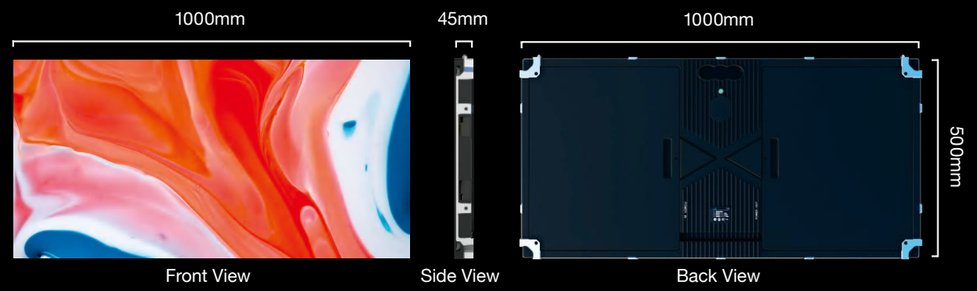

Product Parameters

Pixel pitch (mm)	1.95	2.6	3.91
Module size (mm)	250 x 250 x 3		
Cabinet size (mm)	1000 x 500 x 45		
Cabinet r esolution (pixels)	512×256	384×192	256×128
Pixel density (Pixels/m²)	262144	147456	65536
Cabinet weight (kg)	12		
Cabinet Materials	Die-casting Aluminum		
Brightness (Nit)	650	700	
Refr esh rate (Hz)	2880-3840	≥3840	
Gray lev el (Bit)	13-14		
Contrast ratio	3000:1		
View angle (H/V)	160°/ 120°		
Power consumption (Max/Aver.w/m²)	490/1 70	530/1 75	500/1 70
Input v oltage （V）	100-240		
Working tempreature	-20°C - 50°C		
Working Humidity(Rh)	10%-95%		
Signal type	DVI/HDMI		
Control distance	Cat-5 lan cable:<100m; single-model fiber cable:<10km		

Super lightweight 20KGs/sqm and 45mm ultra-slim design.

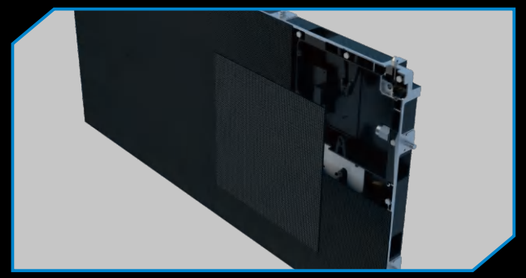

Fast Cooling: Modules without back-shell and PCB direct to cabient design helps to dissipate heat more efficiently.

PSU+HUB+Receiving cards can be maintenaned from front.

Front /R ear installation: support stacking, wall mounting, hanging .

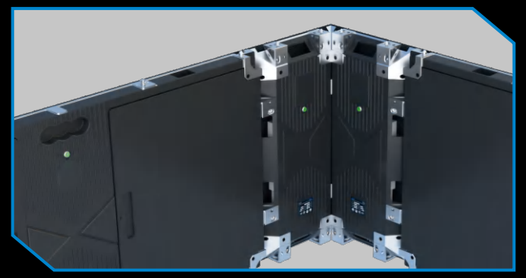

45°cut-corner design(optional) for right angle splicing.